

FICHE TECHNIQUE

installation en coin

Model: FSK-SB-3248-2W-LD
Base R4T-LD

-Acier inox 304 20ga

-Soudée étanche



-connections renvoi:
crépine de douche certifier
UPC

-Revêtement adhérent et
étanchéisant répertoriée par
l'IAPMO comme membrane
d'imperméabilisation,
surpasse
les normes
ANSI A118.10 et
ANSI A118.12.


-Longueur de la grille 27.625"

-Largeur de la grille 5.500"

-Hauteur de la grille 0.625"

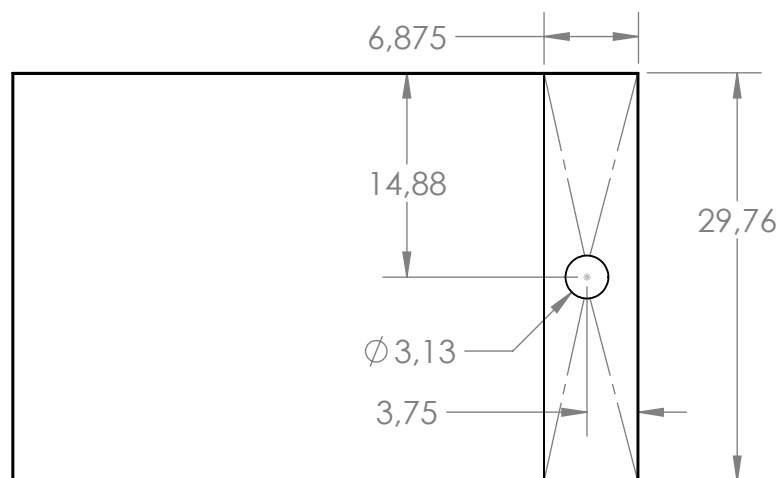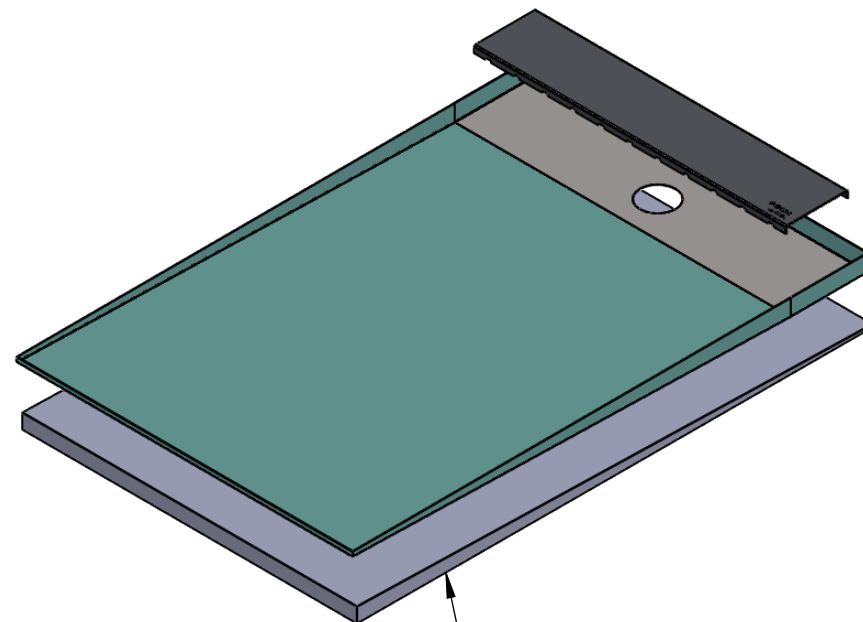

option pente
en polystyrene
haute densité
(R4T-ADDON)

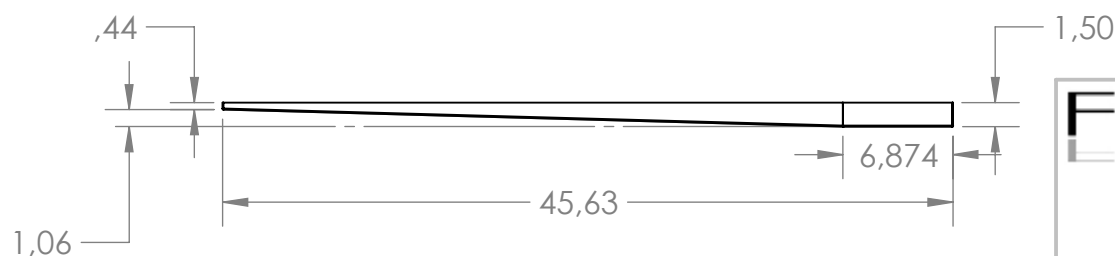

FOSK
FOSK

WWW.FOSK.CA
INFO@FOSK.CA
514-418-7059

TECHNICAL DATA

Corner installation

Model: FSK-SB-3248-2W-LD
Base R4T-LD


-Stainless steel 304 20ga

-Sealed welded


-Return connections:
shower strainer certified
UPC

-Adhesive and sealing coating
waterproofing coating listed by
by IAPMO as a waterproofing
membrane
waterproofing membrane,
exceeds
the standards
ANSI A118.10 and
ANSI A118.12.

-Grid length 27.625
-Grate width 5.500".
-Grid height 0.625".

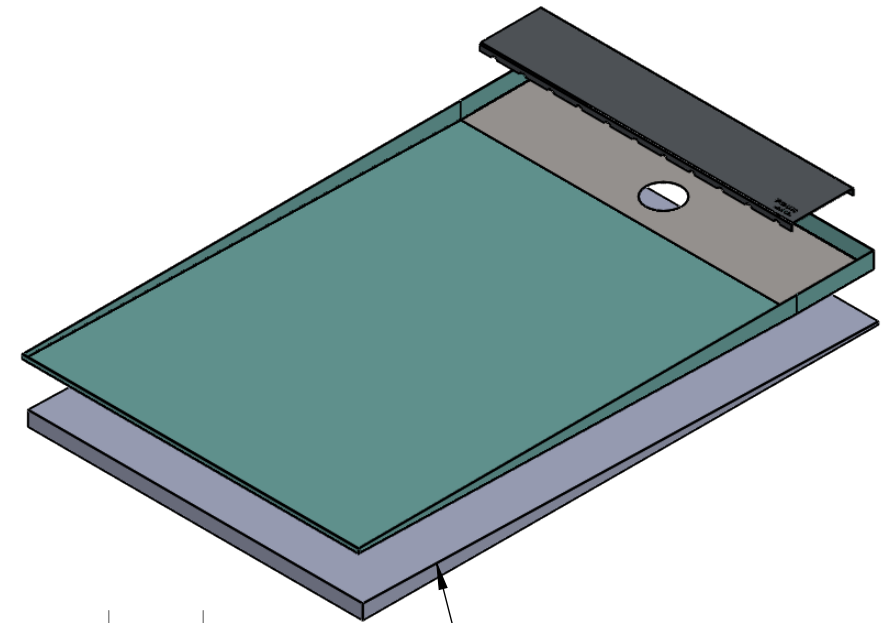

optional high
density
polystyrene
slope
(R4T-ADDON)

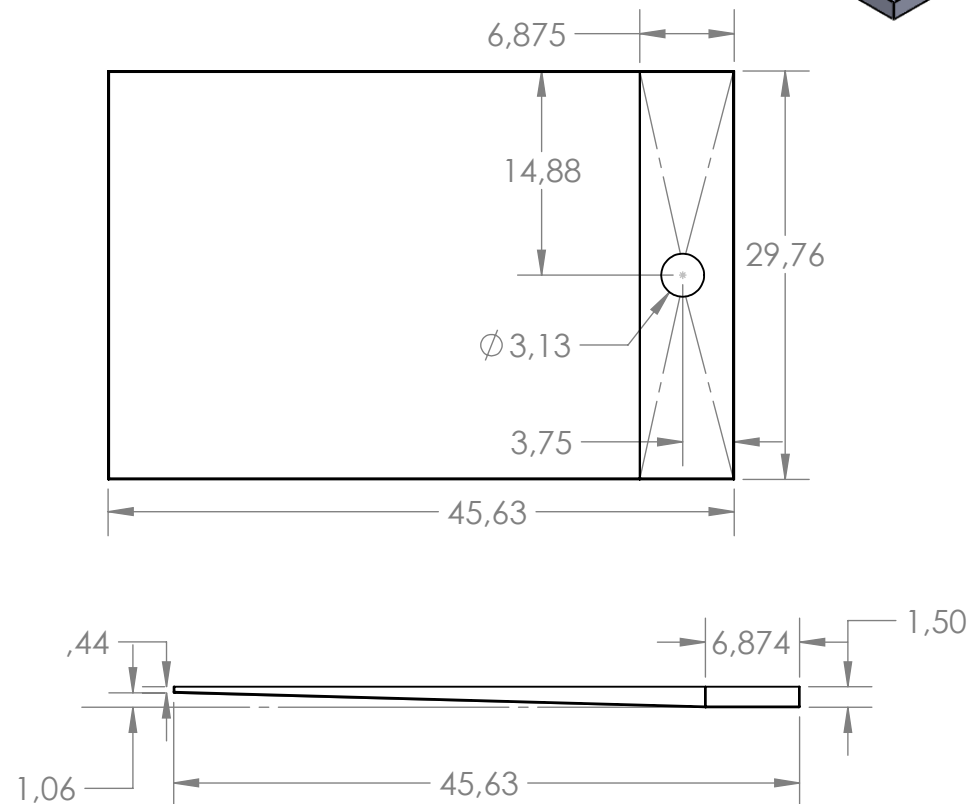

FOSK
FOSK

WWW.FOSK.CA
INFO@FOSK.CA
514-418-7059